


ABSORB RAFTS

Absorb Hanging Rafts are a High-Quality Class A Acoustic Absorber.

Rafts are excellent at battling reverberation and echo and should be suspended directly above the noise source for optimal performance. The Absorb panel core is an open-cell 65% recycled PET panel which is lightweight and easy to suspend, finished in a wide range of industry-leading Camira fabrics, or used in its naked state for a cost-effective solution.

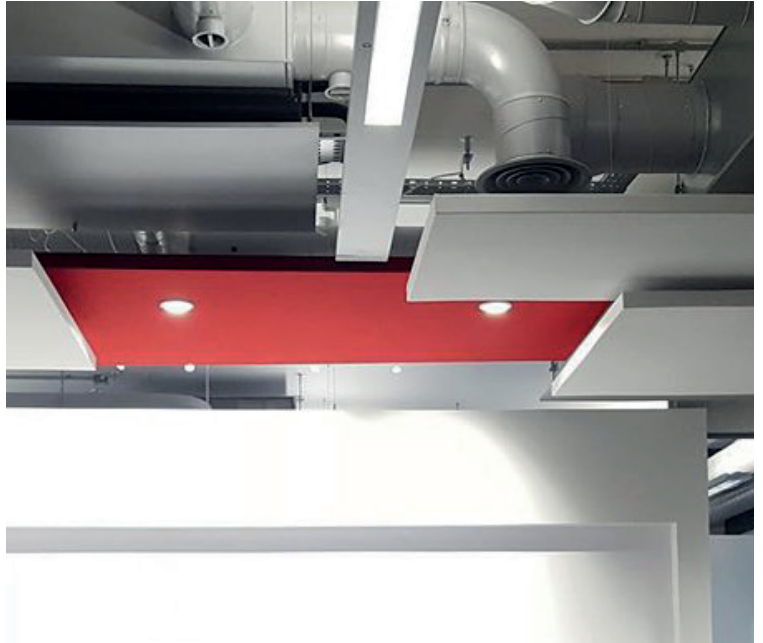

TECH SPECS

STANDARD SIZE


1200mm x 600mm x 50mm

1200mm x 1200mm x 50mm

2400mm x 1200mm x 50mm

*Made to measure

STANDARD SHAPES




CIRCLE




RECTANGLE



HEX



TRIANGLE



SQUARE

FIRE SPECIFICATION

ASTM E84-18a CLASS A

COMPOSITION

65% Recycled PET Fibre | 35% Virgin Fibre

DENSITY

4KG/M2

ACOUSTIC PERFORMANCE

CLASS A

RECOMMENDED SPACING

We recommend a minimum of 75mm spacing from the ceiling.