

SONAHALF

Station Screens






PRODUCT INFO


SonaHalf is a classic half-frontal table screen that strikes the perfect balance between form and function. Standing tall at 585mm with customizable widths, it is designed to seamlessly enhance your desk environment. Usually fixed in front of your table, it creates a focused oasis, shielding you from distractions with its acoustic prowess.

FEATURES

- Half-frontal table screen made from 12mm recycled PET Panel.
- Available in our collection of 24 vibrant colours.
- Durable, flexible, non-combustible, and easy to customise onsite.
- Great absorptive properties to reduce reverberation.
- Effective sound barrier for increase focus and productivity.
- Easy to install with a desk clamp system.



SIZES

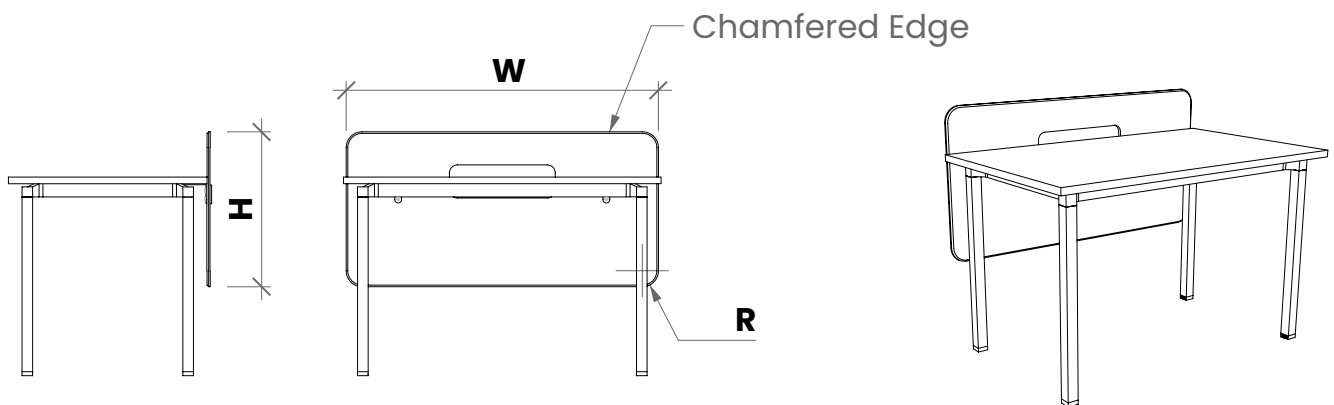

HEIGHT (H)

585mm

WIDTH (W)

1180mm
1380mm
1580mm

RADIUS (R)

60mm

PRODUCT	ARTICLE	DIMENSION	THICKNESS
SonaHalf	05WPSSC-SHF000	Modular dimension as shown	12mm

MATERIAL INFORMATION

COMPOSITION:	75% Recycled PET Fibre 25% Virgin Fibre
FIRE RATING:	12mm EN13501-1:2007+A1:2009 B - S1, D0
DENSITY:	2.4kg/m ² (12mm)
ACOUSTICS:	Class A, C, and D Absorber

*Our Alpha panels have a Thickness Tolerance of ±1 mm and a Length & Width Tolerance of ±3 mm



FINISHES

SonaHalf is made with high quality recycled PET panels. The selection has different colours that would compliment any interior space and concept. Please refer to the QR codes below:



Finishes

Scan the code or visit
www.acousticscompany.com/finishes



Catalogue


Scan the code or visit
<https://acousticpanels.co.uk/wp-content/uploads/2025/09/PRODUCT-BROCHURE-2025.pdf>

INSTALLATION

The Acoustics Company cater for all project budgets and have multiple ways to install a product.

SonaHalf station screen can be installed using the following method:

DESK CLAMP SYSTEM



DESIGN TIPS

These are just some design tips you can do in order to maximize the full potential of our SonaHalf product:

1. SonaHalf is good for medium offices that needs focus.
2. SonaHalf is best suited for single workstations in an open office setup.
3. Choose colour that compliments the interior of the room.
4. Make sure to strategically position wirings and use SonaHalf's dedicated wiring slot for a cleaner look.

ACOUSTIC PERFORMANCE

The acoustic performance of materials refers to their ability to absorb, reflect, or transmit sound waves. This concept is crucial in architecture, interior design, and engineering, as it determines how sound behaves in a space. Materials with good acoustic performance can reduce noise levels, improve speech intelligibility, and create more comfortable and functional environments by controlling reverberation and sound transmission.

TESTING STANDARDS


ISO 354	Measurement of sound absorption in a reverberation room
ISO 11654	Sound absorbers for use in buildings – Rating of sound absorption
ASTM C423-17	Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method
ACOUSTICS:	Sound absorbers for use in buildings – Rating of sound absorption

ACOUSTICALLY TESTED	aw	NRC	CLASS
12mm Direct Fix	0.35(H)	0.45	D
12mm + 75mm Airgap	0.75(MH)	0.85	C
24mm Direct Fix	0.50(MH)	0.65	D
24mm + 75mm Airgap	0.90	1.00	A

For aw, it is strongly recommended to use this single- number rating in combination with the complete sound absorption curve that can be obtained on request

FREQUENCY (Hz)	125	250	500	1000	2000	4000
12mm Direct Fix	0.00	0.10	0.30	0.55	0.80	1.00
12mm + 75mm Airgap	0.15	0.45	0.85	1.00	1.00	1.00
24mm Direct Fix	0.05	0.20	0.60	0.85	1.00	1.00
24mm + 75mm Airgap	0.25	0.60	1.00	1.00	1.00	1.00

Note: The sound absorption values provided in this product sheet are subject to change without prior notice from The Acoustics Company. For the most current and accurate technical specifications, please contact our Sales Team directly.

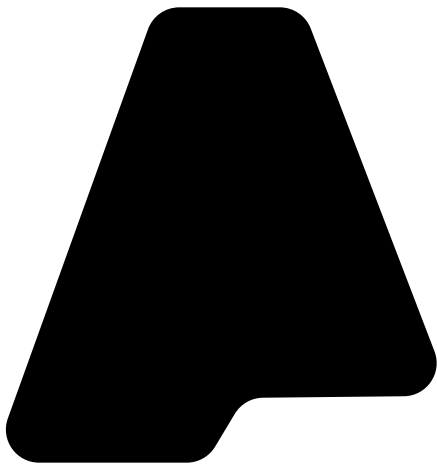

THE ACOUSTICS COMPANY



www.acousticscompany.com [f](#) [@](#) [in](#) @theacousticscompany

#ResonateBliss

SONAFULL

Station Screens



THE
ACOUSTICS
COMPANY





PRODUCT INFO


SonaFull is a full-frontal table screen that serves as an imposing yet elegant barrier, elevating your desk into a focused enclave. Purposefully designed to be fixed seamlessly in front of your table, it creates an acoustic haven, shielding you from the hustle and bustle of the surroundings.

FEATURES

- Full-frontal table screen made from 12mm recycled PET Panel.
- Available in our collection of 30 vibrant colours.
- Durable, flexible, non-combustible, and easy to customise onsite.
- Great absorptive properties to reduce reverberation.
- Effective sound barrier for increase focus and productivity.
- Easy to install with a desk clamp system.



SIZES

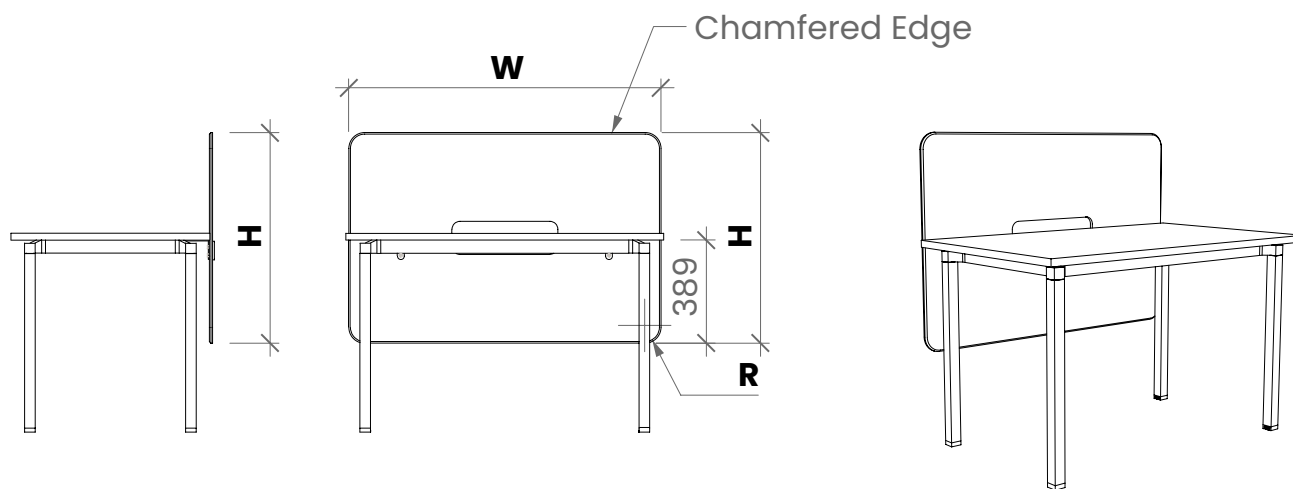

HEIGHT (H)

795mm

910mm

WIDTH (W)

1180mm

1380mm

1580mm

RADIUS (R)

60mm

PRODUCT	ARTICLE	DIMENSION	THICKNESS
SonaFull	05WPSSC-SFL000	Modular dimension as shown	12mm

MATERIAL INFORMATION

COMPOSITION:	75% Recycled PET Fibre 25% Virgin Fibre
FIRE RATING:	12mm EN13501-1:2007+A1:2009 B - S1, D0
DENSITY:	2.4kg/m ² (12mm)
ACOUSTICS:	Class A, C, and D Absorber

*Our Alpha panels have a Thickness Tolerance of ±1 mm and a Length & Width Tolerance of ±3 mm



FINISHES

SonaFull is made with high quality recycled PET panels. The selection has different colours that would compliment any interior space and concept. Please refer to the QR code below:



Finishes
Scan the code or visit
www.acousticcompany.com/finishes



Catalogue
Scan the code or visit
<https://acousticpanels.co.uk/wp-content/uploads/2025/09/PRODUCT-BROCHURE-2025.pdf>

INSTALLATION

The Acoustics Company cater for all project budgets and have multiple ways to install a product.

SonaFull station screen can be installed using the following method:

DESK CLAMP SYSTEM



DESIGN TIPS

These are just some design tips you can do in order to maximize the full potential of our SonaFull product:

1. SonaFull is good for medium offices that needs enhanced focus.
2. SonaFull is best suited for single workstations in an open office setup.
3. Choose colour that compliments the interior of the room.
4. Make sure to strategically position wirings and use SonaFull's dedicated wiring slot for a cleaner look.

ACOUSTIC PERFORMANCE

The acoustic performance of materials refers to their ability to absorb, reflect, or transmit sound waves. This concept is crucial in architecture, interior design, and engineering, as it determines how sound behaves in a space. Materials with good acoustic performance can reduce noise levels, improve speech intelligibility, and create more comfortable and functional environments by controlling reverberation and sound transmission.

TESTING STANDARDS


ISO 354	Measurement of sound absorption in a reverberation room
ISO 11654	Sound absorbers for use in buildings – Rating of sound absorption
ASTM C423-17	Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method
ACOUSTICS:	Sound absorbers for use in buildings – Rating of sound absorption

ACOUSTICALLY TESTED	α_w	NRC	CLASS
12mm Direct Fix	0.35(H)	0.45	D
12mm + 75mm Airgap	0.75(MH)	0.85	C
24mm Direct Fix	0.50(MH)	0.65	D
24mm + 75mm Airgap	0.90	1.00	A

For α_w , it is strongly recommended to use this single- number rating in combination with the complete sound absorption curve that can be obtained on request

FREQUENCY (Hz)	125	250	500	1000	2000	4000
12mm Direct Fix	0.00	0.10	0.30	0.55	0.80	1.00
12mm + 75mm Airgap	0.15	0.45	0.85	1.00	1.00	1.00
24mm Direct Fix	0.05	0.20	0.60	0.85	1.00	1.00
24mm + 75mm Airgap	0.25	0.60	1.00	1.00	1.00	1.00

Note: The sound absorption values provided in this product sheet are subject to change without prior notice from The Acoustics Company. For the most current and accurate technical specifications, please contact our Sales Team directly.

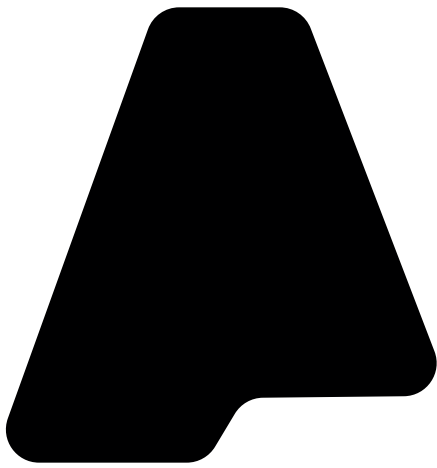

THE ACOUSTICS COMPANY



 www.acousticscompany.com    @theacousticscompany

#ResonateBliss